

Stainless Steel Braided Flexible Supply Line

Conduit d'alimentation tressé en acier inoxydable flexible



Product Specifications



Material Specifications

No.	Description	Material
1	Insert	C37100
2	Washer	EPDM
3	Nut	HPb57-3
5	Ferrule	SS304
6	Braided wire	SS304
7	INNER TUBE	PVC
8	MALE	C37100
9	Olive	H62
10	Nut	HPb57-3


FEATURES

- 304 stainless steel braided flexible hose
- Reinforce PVC inner tube ID 7.7 X OD12.5mm
- Faucet connector, OD13mm
- Maximum Working Pressure: ≤125 PSI(8.6bar),
- Maximum Temperature: ≤180°F(82°C)
- Product comply with CUPC, AB1953
- IAPMO listed

CARACTÉRISTIQUES

- Tuyau flexible tressé en acier inoxydable 304
- Tube intérieur en PVC renforcé (diamètre intérieur : 7,7 mm x diamètre extérieur : 12,5 mm)
- Raccord de robinet (diamètre extérieur : 13 mm)
- Pression de service maximale : ≤ 125 PSI (8,6 bar)
- Température maximale : ≤ 180 °F (82 °C)
- Produit conforme aux normes CUPC et AB1953
- Homologué IAPMO

MODEL	SIZE	LENGTH	WEIGHT (LB)
MLB112KCF	3/8C X FM 3/8C	12"	0.19
MLB120KCF	3/8C X FM 3/8C	20"	0.26

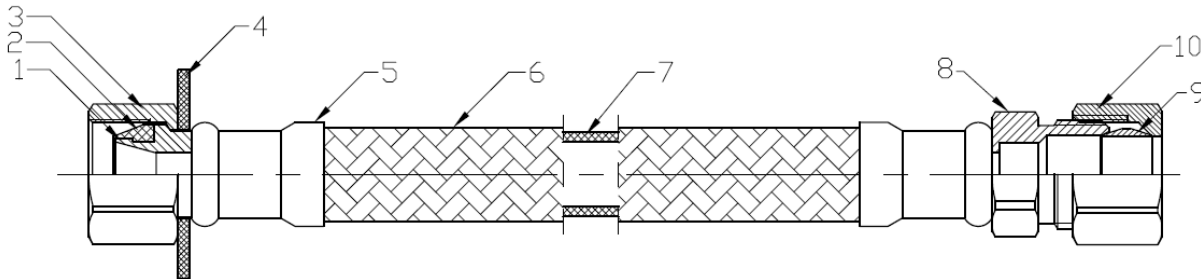

Contact your sales representative for more information or visit our website at mainlinecollection.ca